

**MPL**  
serie "S"

**MPL 15S**  
**MPL 22S**



**MPL 31S**  
**MPL 44S**

**MPL 62S**  
**MPL 76S**

**MPL 94S**  
**MPL 111S**

**MPL 143S**  
**MPL 172S**

**Standard Version**


**CONTROL PANEL**

- Start/stop key
- Operation and Alarms
- Ammeter
- Voltmeter
- Hourmeter
- Fuel level gauge


**POWER CUBICLE**

- Circuit breaker
- Power cables - terminal board
- Connection for remote starting panel


**Optional**




**Earth fault device**




**Sockets panel with circuit breaker / Earth fault device**



**Automatic starting**




**Automatic Transfer Switch in a separate box**




**Remote control panel with 50 mt. cable**


**Optional**




**Automatic top-up device for on-board tank with retention bund (MISA)**




**Fuel Tank 50 lt. (MISA)**




**Sound-proof material CL.1 (MISA)**



**Fuel tank with retention bund and fork lift channels**  
(200 lt MPL15-22S)  
(250 lt MPL31-44S)  
(400 lt MPL62-76S)  
(500 lt MPL94-111S)  
(500 lt MPL143-172S)







**Version with Site tow (MPL 15-22S) (MPL 31-44S) (MPL 62-76S)**



**Oil heater engine (MPL 15-22S 31-44S)**  
**Water heater engine (MPL 62-76S)**

Standard  
Version

	MPL 15 S	MPL 22S	MPL 31 S	MPL 44S	MPL 62 S	MPL 76S	MPL 94 S	MPL 111S	MPL 143 S	MPL 172S
<b>Max Power</b>	13,1 kVA	22,2 kVA	30,4 kVA	44 kVA	62 kVA	76 kVA	94 kVA	111 kVA	143 kVA	172 kVA
<b>Cont.Power</b>	12,5 kVA	20,2 kVA	27,6 kVA	40 kVA	58 kVA	73 kVA	90 kVA	106 kVA	136 kVA	164 kVA
<b>L</b>	1950		2200		2600		3050		3100	
<b>W</b>	900		900		900		1000		1100	
<b>H</b>	1070		1190		1190		1450		1450	
<b>Ht</b>	1125		1313		1313		1565		1565	
<b>Weight</b>			920 kg	980 kg	1160 kg	1210 kg	1590 kg	1670 kg	1800 kg	1950 kg
<b>Autonomy</b>	25 h	17 h	11,5 h	8 h	5,5 h	4,5 h	11 h	9 h	7 h	6 h

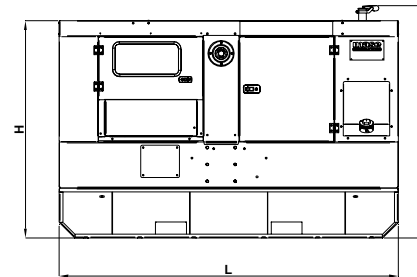
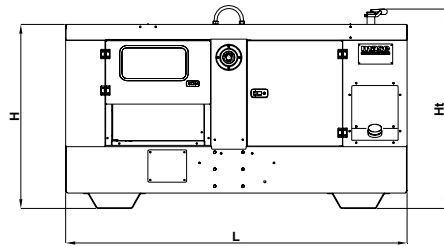


Fuel tank with  
retention  
bund and  
fork lift  
channels

	MPL 15 S	MPL 22S	MPL 31 S	MPL 44S	MPL 62 S	MPL 76S	MPL 94 S	MPL 111S	MPL 143 S	MPL 172S
<b>L</b>	1950		2200		2600		3050		3100	
<b>W</b>	900		900		900		1000		1100	
<b>H</b>	1270		1415		1510		1755		1700	
<b>Ht</b>	1325		1515		1610		1870		1815	
<b>Weight</b>			1130 kg	1160 kg	1410 kg	1460 kg	1860 kg	1960 kg	2100 kg	2250 kg
<b>Autonomy</b>	77 h	54 h	44 h	30 h	34 h	27 h	35 h	29 h	22 h	19 h

Version with  
Site tow

	MPL 15 S	MPL 22S	MPL 31 S	MPL 44S	MPL 62 S	MPL 76S
<b>L</b>	2910		3180		3580	
<b>W</b>	1285		1420		1420	
<b>H</b>	1370		1455		1455	
<b>Ht</b>	1455		1555		1555	
<b>Weight</b>			1020 kg	1050 kg	1260 kg	1310 kg
<b>Autonomy</b>	25 h	17 h	11,5 h	8 h	5,5 h	4,5 h

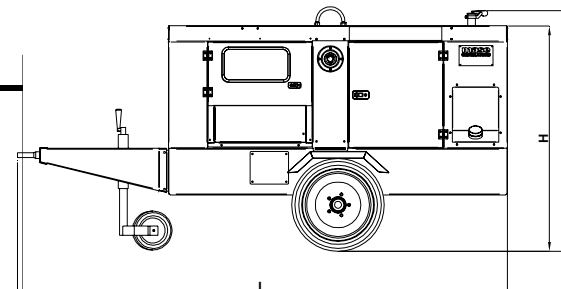

### Mase Generators of North America, LLC

3750 Hacienda Blvd, Suite E  
Davie, FL 33314

Ph. 954-327-0234, Fax 954-327-0245  
email:: MaseGen@MaseNorthAmerica.com  
Website www.MaseNorthAmerica.com

